

INDUCTION MOTOR

90W

□90mm-2POLES LEAD WIRE TYPE

INDUCTION MOTOR

K9IS90F□-2P




SPECIFICATIONS

90W 连续正格，2极

Model		Voltage (V)	Frequency (Hz)	Current (A)	Start T. (N*m/Kgf*cm)	Rated T. (N*m/Kgf*cm)	Speed (rpm)	Condenser (μF)
K9I□90FC-2P	单项	220	50	0.68	0.36	0.32	2700	5
					3.60	3.20		
			60	0.83	0.35	0.27	3200	
					3.50	2.70		
		230	50	0.71	0.37	0.32	2700	
					3.70	3.20		
60	0.87	0.37	0.27	3200				
		3.70	2.70					
K9I□90FH-2P	三相	220	50	0.53	1.14	0.32	2700	—
					11.40	3.20		
			60	0.52	0.93	0.27	3200	
					9.30	2.70		
		230	50	0.56	1.24	0.32	2700	
					12.40	3.20		
60	0.54	0.99	0.27	3200				
		9.90	2.70					
K9I□90FM-2P	三相	380	50	0.30	1.08	0.32	2700	—
					10.80	3.20		
60	0.30	0.89	0.27	3200				
		8.90	2.70					
K9I□90FZ-2P	三相	440	50	0.26	1.08	0.32	2700	—
					10.80	3.20		
60	0.26	0.87	0.27	3200				
		8.70	2.70					

* □: 电机轴形状 (S: STRAIGHT)

DIMENSIONS & CONNECTION DIAGRAMS

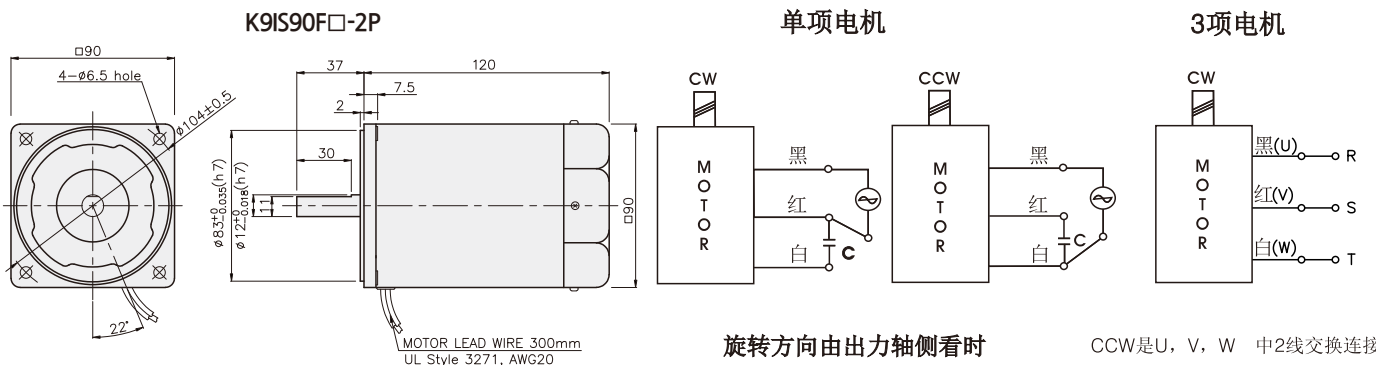

重量

PART	WEIGHT(kg)
MOTOR	2.56

旋转方向由出力轴侧看时

CCW是U, V, W 中2线交换连接