

## INDUCTION MOTOR

**90W**

**□90mm-2POLES**

**LEAD WIRE TYPE**

INDUCTION MOTOR

K9IS90F□-2P




### SPECIFICATIONS

90W 連続定格、2極

Model		Voltage (V)	Frequency (Hz)	Current (A)	Start T. (N*m/Kgf*cm)	Rated T. (N*m/Kgf*cm)	Speed (rpm)	Condenser (μF)			
K9I□90FC-2P	単相	220	50	0.68	0.36 3.60	0.32 3.20	2700	5			
			60	0.83	0.35 3.50	0.27 2.70	3200				
		230	50	0.71	0.37 3.70	0.32 3.20	2700				
			60	0.87	0.37 3.70	0.27 2.70	3200				
		K9I□90FH-2P	三相	220	50	0.53	1.14 11.40		0.32 3.20	2700	—
					60	0.52	0.93 9.30		0.27 2.70	3200	
230	50			0.56	1.24 12.40	0.32 3.20	2700				
	60			0.54	0.99 9.90	0.27 2.70	3200				
K9I□90FM-2P	三相			380	50	0.30	1.08 10.80	0.32 3.20	2700	—	
					60	0.30	0.89 8.90	0.27 2.70	3200		
K9I□90FZ-2P	三相	440	50	0.26	1.08 10.80	0.32 3.20	2700	—			
			60	0.26	0.87 8.70	0.27 2.70	3200				

\* □: シャフト形状 (S: STRAIGHT)

### DIMENSIONS & CONNECTION DIAGRAMS

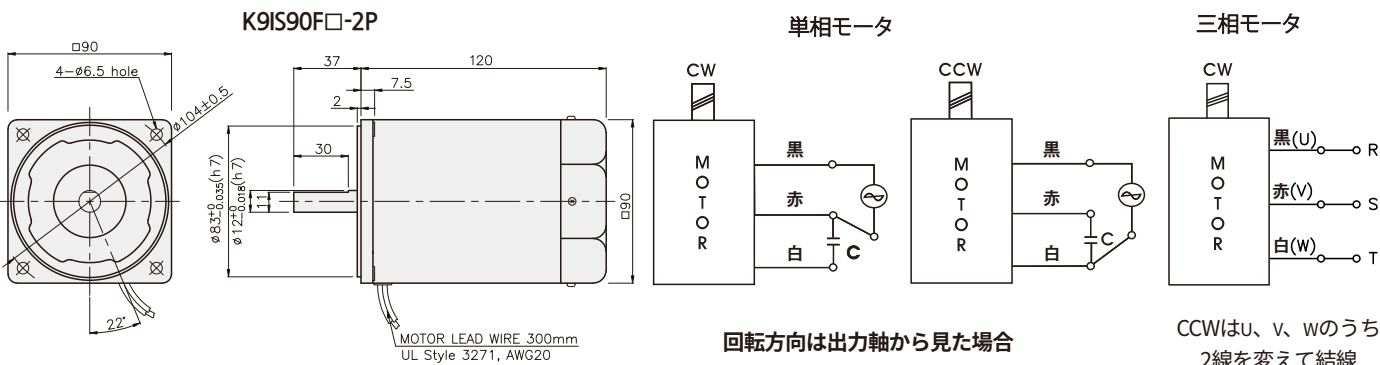

重さ

PART	WEIGHT(kg)
MOTOR	2.56