

## INDUCTION MOTOR

**90W**

**□90mm-2POLES** LEAD WIRE TYPE

INDUCTION MOTOR

K9IS90F□-2P




### SPECIFICATIONS

90W 연속정격, 2극

Model	Voltage (V)	Frequency (Hz)	Current (A)	Start T. (N*m/Kgf*cm)	Rated T. (N*m/Kgf*cm)	Speed (rpm)	Condenser (μF)		
K9I□90FC-2P	단상	220	50	0.68	0.36 3.60	2700	5		
			60	0.83	0.35 3.50	3200			
		230	50	0.71	0.37 3.70	2700			
			60	0.87	0.37 3.70	3200			
	K9I□90FH-2P	삼상	220	50	0.53	1.14 11.40		2700	—
				60	0.52	0.93 9.30		3200	
230			50	0.56	1.24 12.40	2700			
			60	0.54	0.99 9.90	3200			
K9I□90FM-2P		삼상	380	50	0.30	1.08 10.80	2700	—	
				60	0.30	0.89 8.90	3200		
K9I□90FZ-2P	삼상	440	50	0.26	1.08 10.80	2700	—		
			60	0.26	0.87 8.70	3200			

\* □ : SHAFT 형상 ( S : STRAIGHT )

### DIMENSIONS & CONNECTION DIAGRAMS

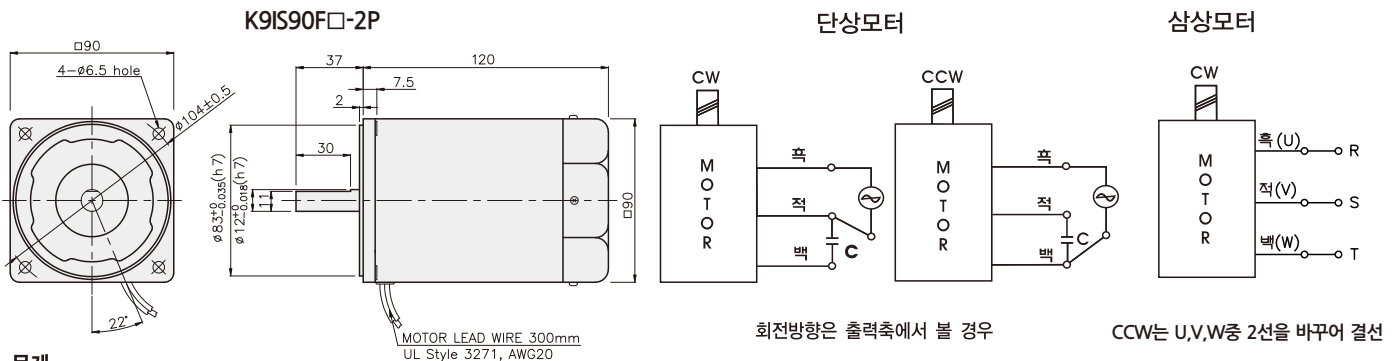

무게

PART	WEIGHT(kg)
MOTOR	2.56